

MultiControl + ThermoConnect TCon2

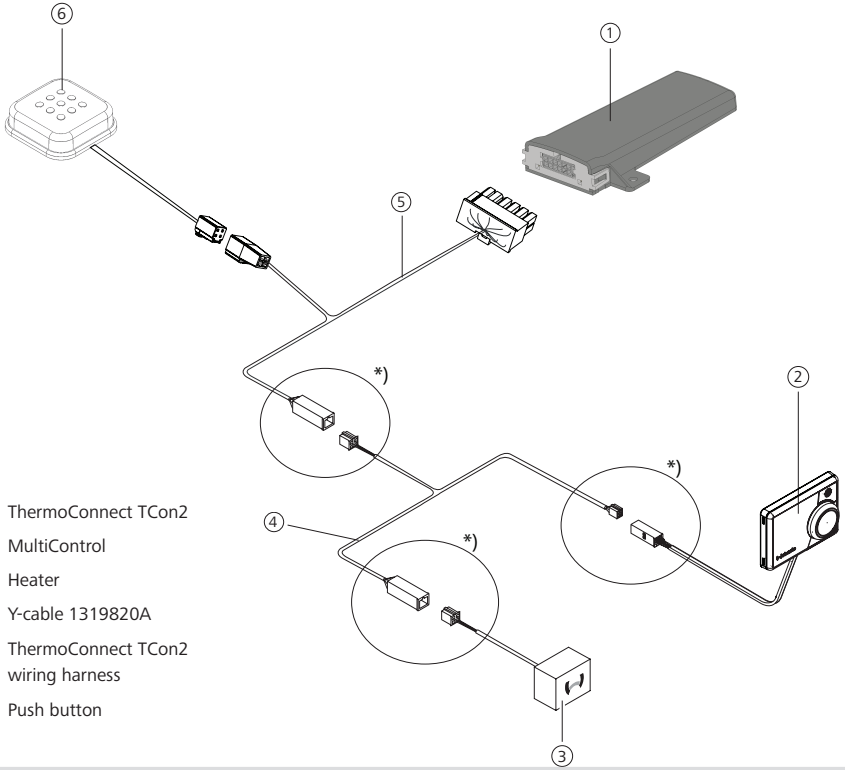

1 ThermoConnect TCon2
2 MultiControl
3 Heater
4 Y-cable 1319820A
5 ThermoConnect TCon2 wiring harness
6 Push button

*): check the pins corresponding



1	Yellow - W-Bus
2	Black - Analogue
3	Red - Pin 30, power supply
4	Brown - Pin 31, ground

For the correct installation of the ThermoConnect TCon2 in combination with a MultiControl, use one of the following options:

Option 1:

▶ Unplug the black cable from the MultiControl or the ThermoConnect TCon2.

Option 2: Disabling the parallel control.

1. Open the My Webasto Connect app.
2. In **Settings**, switch the **Device configuration settings** to **Visible**.
3. In **Outputs** select **Output 1.**
4. In **Output 1** select **Disabled.**

Ident. No. 9041610A • 02/2022 • Errors and omissions excepted • © Webasto Thermo & Comfort SE

Webasto Thermo & Comfort SE
PO Box 1410
82199 Gilching
Germany

Visiting address:
Friedrichshafener Str. 9
82205 Gilching
Germany

Technical Extranet:

http://dealers.webasto.com

www.webasto.com